




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06F 1/00, H04L 29/06	A1	(11) International Publication Number: WO 00/03316 (43) International Publication Date: 20 January 2000 (20.01.00)
(21) International Application Number: PCT/EP98/04249 (22) International Filing Date: 8 July 1998 (08.07.98) (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: RATAYCZAK, Georg; Wallstrasse 5, D-52538 Gangelt (DE). NIEBERT, Norbert; Steppenbergr 83, D-52074 Aachen (DE). (74) Agents: VON FISCHERN, Bernhard et al.; Hoffmann . Eitle, Arabellastrasse 4, D-81925 München (DE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: A METHOD FOR SECURING ACCESS TO A REMOTE SYSTEM**(57) Abstract**

Method for secure user access to a remote system using a communications device. Access to the system is released only after the input of valid code words via independent communications devices. One of the communications devices may be a data processing unit and the second communications device may be a mobile telephone.

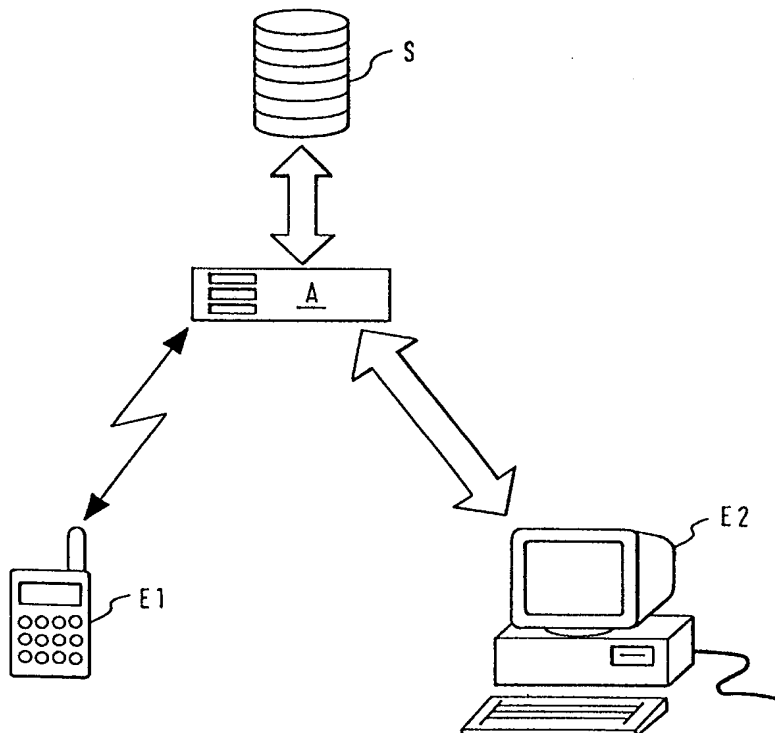

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A method for securing access to a remote system

The present invention relates to a method for securing
5 access to a system. In particular, the invention relates to
a method for securing access to data of a remote system
using a communications apparatus.

Because of the increasingly widespread deployment and use
10 of data networks, security aspects are becoming
increasingly important in various applications. These may
be applications in which secret information is transferred
between data processing devices via a data network, e.g. in
electronic payments transactions, electronic "shopping" and
15 the like. Most importantly, security requirements include,
apart from secure transmission of data via the network, the
identification of an authorized user. In particular, when
an authorized user wishes to access, via a publicly
accessible data network, to a system and/or to data stored
20 there and associated with it, it must be ensured by
specific arrangements, that only the authorized user can
access associated data.

For example, the data network can be an internet,
25 comprising a large number of computers are connected with
each other to form a generally accessible network. Since in
such a network there are no secure data transmission lines,
other ways are required to secure data and to identify an
authorized user.

30

In general, a secure unit requests the input of a code word
for authenticating a user, thus clearly identifying the

user.

This process of securing access from a communications device to a remote system is generally known. An example is shown in figure 8. C' marks a communications device, A' an access device and S' the system. Access from the communications device to the system is cleared as follows: in a first step, a code word is entered at the communications device C'. It is then transmitted to the access device A' where it is checked for validity. In case the code word is determined to be valid, the access device releases access to the system by the communications device C'.

A large number of such processes, identifying a subscriber by means of such code word, are known. However, like the example described above, they do have the disadvantage that the knowledge of the code word allows an unauthorized user to, e.g., access data of another user or to otherwise take not allowed influence on the system.

It is therefore object of the invention to provide a method for securing access to data allowing greater security in authenticating an authorized user wishing to access said data.

This object of the present invention is solved methods with the features of claims 1. The method with the features of claim 1 advantageously allows the secure identification of a user, by using two individual connections between a first and a second communications device and a determining

device, in order to transmit a first and a second code word to the determining device for checking.

The problem of the present invention is furthermore solved
5 by a method with the features of patent claim 3. The method in accordance with claim 3 permits improved security of access to the system due to the fact that after the transmission and checking of a first code word by the determining device, a second code word is transmitted to
10 the second communications device, for input into the first communications device and transmission from the first communications device to the transmission device for checking.

15 In an advantageous embodiment of the invention, a data processing device can be used as one of the two communications devices, connected to the determining device via a data network. A telephone can be used as the second communications device, connected to the determining device
20 via a telephone line.

The connections can particularly advantageously be established via an Internet and/or via a mobile radio network. In this connection it is possible that after
25 establishing the connection between the data processing device and the determining device and after input of the code word by depressing one or more keys on the mobile telephone, access to the system and/or to subscriber data stored in a data memory of the system is released. By use
30 of a mobile telephone allocated to a subscriber, a secure identification of the subscriber can be carried out.

In a further advantageous embodiment of the method in accordance with the invention, the transmission device may generate a code word using a secret algorithm. The code word may be transferred to one of the communications devices for input into the other one of the two communications devices, and for subsequent retransmission to the access device for investigation. This allows a further enhanced security.

10

In addition, one of the code words can be used to carry out data encoding of data transmitted between one or both of the communications devices and the determining device. In general, a code word may be derived from predetermined subscriber data, the date or the time. Further, the code word may be valid for only one access procedure.

15

For the implementation of the method for securing access to a system, advantageously an access device may be used, which on the one hand is connected with the system and on the other is connected, via separate communication paths, with two communication devices for the transmission of code words and for access to the system, preferably a data processing unit and a telephone/mobile telephone.

20

Further embodiments and advantageous modifications of the method become obvious with the subclaims.

Brief description of the figures:

25

Fig. 1 shows a schematic illustration of an embodiment

30

of the method in accordance with the invention
for securing access to a remote system;

5 Fig. 2 shows a flow diagram of the embodiment of the
method in accordance with the invention of Fig.
1;

10 Fig. 3 shows a schematic illustration of a further
embodiment of the method in accordance with the
invention;

15 Fig. 4 shows a flow diagram of the embodiment of the
method in accordance with the invention of Fig.
3;

Fig. 5 shows a schematic illustration of another
embodiment of the method in accordance with the
invention;

20 Fig. 6 shows a flow diagram of the embodiment of the
inventive method in accordance with Fig. 5;

25 Fig. 7 shows a block diagram of a device for carrying
out the method in accordance with the invention;
and

Fig. 8 shows a schematic illustration of a known access
procedure.

30 In the following, the invention is described with respect
to the figures.

Fig. 1 shows a first embodiment of the method in accordance with the invention, wherein individual process steps are illustrated using arrows. Fig. 1 shows first communications
5 device C1, a second communications device C2 as well as an access device A and a system S, to which access is to be obtained. Further devices, such as for example communications lines, data transmission devices and the like are not shown. Reference numerals S11, S12 and S13
10 denoting the arrows illustrate process steps which are carried out successively in the embodiment of the method in accordance with the invention.

Figure 2 shows a flow diagram of the embodiment shown in
15 Fig. 1 to further clarify the process in accordance with the invention for securing access to a remote system.

In the following, steps for executing the procedure in accordance with figures 1 and 2 will be described. At
20 first, the step denoted S11 is carried out. In step S11, a first connection is established from the communications device C1 to an access device A and, besides identifying a user, a first code word is transmitted from the first communications device C1 to the access device A. The first
25 code word is received by the access device A and it is compared with authentication data stored in access device A. The comparison can be a known procedure for the verification of a transmitted code word. For example, in access device A, a copy of the first code word could be
30 stored and it could be determined by comparison, whether the code word which was transmitted is the requisite code

- word. It could also be determined by a mathematical operation whether the first code word is correct, by checking a particular relationship to the authentication data which are stored in access device A. If the first code
- 5 word is determined as being incorrect, the execution of the process proceeds to the end point of the flow diagram shown in figure 2. If the first code word is found to be correct, the process moves on to a step S12.
- 10 In step S12, a connection is established from the second communications device C2 to access device A. A second code word is transmitted via this connection to the access device. This second transmitted code word is received at the access device and is authenticated, as was already
- 15 described in step S11. The code word can be a fixed sequence of signs, which identify the user and a code portion which is known only to the user. But identification of the user may also be carried out in a differently. If no user assigned code word has been transmitted, the process
- 20 moves on to the end point shown in the flow diagram of Fig. 2. If the second code word is determined to be correct, the process moves on to step S13.
- In step S13, access to the system S is released by the
- 25 access device A from one or both of the communications devices C1, C2. This access to system S may be such that data can be transferred to system S and/or data can be retrieved from system S via one or both of the communications devices C1, C2. In addition, it is possible
- 30 that the authorized user can trigger certain functions of the system S via one or both of the communications devices

C1, C2. In the embodiment described, process steps are carried out in sequence, preferably in the sequence S11 - S13. However, modifications of this sequence or partial steps are possible.

5

As in the case of a device described in more detail later with reference to Fig. 7, in a second embodiment a data processing unit can be used as the first communications device C1 and wherein the connection between this data
10 processing unit and the access device A is established via a data processing network.

The data processing unit may be constituted by a personal computer available on the market, which is equipped with a
15 suitable modem. The connection between the personal computer and the access device A may be established via a data network, for example the Internet. The provision of a connection from a computer via an internet to the access device A, which may also be constituted by a computer or a
20 server, optionally with special functions and features, is well known and will not be further explained at this point. In addition, in the second embodiment, the second communications device C2 may be constituted by a telephone and the connection between the telephone and the access
25 device A may be established via a telephone network. In this connection, the telephone network may preferably be a mobile radio network or a conventional fixed telephone network and/or PSTN.

30 Thereby it is possible that the connections between the first and/or second communications devices C1, C2 and the

access device A may be established via separate communications routes independent from each other.

Furthermore, in the second embodiment, the system S to be
5 accessed, may be a mobile radio network and/or a memory
device of the mobile radio network, in which specific
subscriber-related data are stored, but in particular a
telephone network in accordance with the GSM standard. In
10 case of a GSM network, the access device may advantageously
be an expansion of the HLR (home location register) which
forms a unit with a server of the worldwide web (WWW)
and/or of the Internet. In this embodiment, access is
advantageously controlled to the HLR (home location
15 register) by the access device A. In this HLR register,
subscriber-specific data are stored, for example for
services such as forwarding of calls or other configuration
settings which concern the subscriber. The above described
embodiment enables a subscriber a secure access to the
20 communication network or to subscriber data associated with
him stored in the HLR register.

Therefore the user may alter in a particularly convenient
way, for example, configuration settings, activate certain
services and deactivate them and may retrieve, change or
25 store information and data. The communication between the
user and the system, necessary for transmission of the code
words, may be carried out, inter alia, via USSD
(unstructured supplementary service data).

30 Access to subscriber-specific data stored in the HLR
register in this embodiment may be carried out as follows

when relying on the method in accordance with the invention shown in figures 1 and 2.

5 A subscriber wishing access to the subscriber data in the HLR register associated with him, establishes a connection between a data processing unit constituting one of the communications devices and which is connected by the internet (WWW client) to access device A. In this case, this is an internet server forming a unit with an expansion
10 of the HLR. Authentication of the user and/or subscriber is carried out by the transmission and validation of the first code word in step S11, shown in figures 1 and 2, to access device A. Here, the communication between the data processing unit and the access device A may be performed in
15 accordance with a so-called TCP/IP protocol.

If the access device A determines the user as being authorized, access device A awaits an input of a second code word via a second communications device, in this case
20 the mobile telephone or a fixed network telephone (step S12). In further embodiments, access device A may transmit a request for an input of the second code word (step 12) via an interface to the GSM network of the mobile telephone or of a fixed network telephone. The input of the code word
25 may be carried out using a telephone keyboard by pressing a single key, for example the call demand key, or by pressing a sequence of keys.

After authorization of the second code word and therefore
30 of the subscriber at access device A, the access device allows access to system S (step S13 in figures 1 and 2).

This may be access to subscriber-specific data stored in the memory device of the HLR register or it may be an activation or deactivation of certain services. After access has been granted, one of the two communications
5 devices C1, C2, i.e. the data processing unit or the telephone or both, may actually be used for accessing the system.

By means of this procedure, for example a selective access
10 of a particular subscriber of a mobile radio network to data assigned to this subscriber may be made allowed. Preferably, by this proceeding, access is granted only to subscriber-specific data and services which assigned to a specific subscriber. For example, in a GSM network, the
15 identity of the specific mobile telephone used by a particular user is permanently known, and therefore a fraudulent authentication of a particular subscriber may not be performed using any other communications device.

20 By the input of at least one further code word via one of the communications devices C1, C2 and by transmission of this at least one further code word to access device A, expanded access to the system or to subscriber data stored in the memory device of the HLR register may be allowed.

25

In Fig. 3, a third embodiment of the method in accordance with the invention for securing access to a remote system is shown will be described. As already shown in the first embodiment of Fig. 1, a first communications device C1, a
30 second communications device C2, an access device A and a system S are illustrated. In addition, arrows representing

individual process steps are denoted by S31 to S35. The process steps are preferably carried out successively in the sequence S31 to S35. However, modifications of this sequence or of partial steps are possible.

5

Figure 4 shows a flow diagram of the embodiment in Fig. 3 to further outline the embodiment of the invention.

In the following, the process steps of figures 3 and 4 will
10 be described in more detail. In a first step S31, a communication is established between the first communications device C1 and the access device A and, apart from a user identification, a first code word is transmitted to access device A. The access device compares
15 the first code word with stored authentication data. This may be done similar to the authentication procedure already described with respect to example of embodiment 1. If the code word is not recognized as correct, the process ends, as shown in Fig. 4. Otherwise, the sequence of steps
20 proceeds to step S32.

In step S32, a second code word is transmitted from access device A to the communications device C1, e.g., for display. This second code word may be a predetermined code
25 word or it may be generated by access device A using a secret algorithm. For example, the second code word may be derived from subscriber-specific identification data and/or the time and/or the date. Thereby it becomes possible that this second code word or another code word generated by
30 access device A is only valid for one access. In addition, the second or another code word may be used for data

encoding a data transmission between the first or the second communications device C1, C2 and the access device A.

- 5 In a step S33 the second code word is transmitted from the first communications device C1 to the second communications device C2. This may be done by a read out operation from the first communications device C1 and an input operation at the second communications device C2 or by another form
10 of data transmission.

After input of the second code word at the second communications device C2, in a step S34 the second code word is transmitted to the access device A and is
15 authenticated there in accordance with the authentication process which was described above. If the second code word transmitted to the access device is determined to be incorrect, the process moves on to END, as shown in the flow diagram of figure 4.

20

If the code word is recognized as being valid, in step S35 access from one of the communications devices C1, C2 to system S is granted, as it was described above in more detail with reference to the first or second embodiment. In
25 a modification of this third embodiment, it is possible that after transmission of a first code word from the communications device C1 and thereafter of a second code word from communications device C2 to access device A, a third code word is transmitted from access device A to the
30 communications device C1 and from there to communications device C2, and is then transferred by communications device

C2 to access device A for authentication.

As with respect to the second embodiment, and also with respect to Fig. 7, in order to realize the inventive proceeding, the communications device C1 may be a data
5 processing unit connected with access device A via the internet, and the communications device C2 may be a telephone and/or a mobile telephone, connected to access device A via a fixed telephone network and/or a mobile
10 radio network. As was described in the embodiment, in this case, code words may be transmitted by the telephone by activating a sequence of telephone keys or a separate telephone key, such as, for example, the call connection key.

15 Attention is drawn to the fact that in other examples of embodiments, the communications device C1 may be a telephone/ mobile telephone and/or the communications device C2 may be a data processing unit. In addition, the
20 second code word which is transmitted from access device A to communications device C1 may be generated by access device A, for example using subscriber-specific identification data and/or the time and/or the date. Thus it is possible that this second code word, or another code
25 word generated by access device A, is valid only for one access session. Furthermore, one of the code words transmitted may be used for data encoding in a data transmission between the first or the second communications devices C1, C2 and the access device A. This may improve
30 the security of access to the system. Preferably, the second code word generated by access device A would be used

for such data encoding.

By inputting of at least one further code word via one of the communications devices C1, C2 and by transmission of
5 this at least one further code word to access device A, expanded access to the system or to other data stored in the memory device of the system may be released.

Figure 5 describes a further embodiment for a realization
10 of the method in accordance with the invention for secure access to a remote system. As has already been described with respect to the embodiments 1 and 3, Fig. 5 schematically illustrates a first communications device C1, a second communications device C2, an access device A and a
15 system S. To further outline the procedure and their realization, process steps S51 to S55 are denoted by arrows. Figure 6 shows a flow diagram for further explaining the drawing shown in Fig. 5.

20 Below the realization of the method in accordance with the invention for secure access by a user to the remote system S is described with regard to figures 5 and 6.

In process step S51, as in steps S11 and S31, a first
25 connection is established between a first communications device C1 and an access device A, and, apart from a user identification, a first code word is transmitted from the first communications device C1 to access device A where it is authenticated. If the transmitted code word is found to
30 be invalid, the process moves on to the end point of the flow diagram shown in Fig. 6. If the code word is found to

be valid, the process moves on to step S52.

In step S52, by access device A a second code word is generated, for example by means of a secret algorithm, as
5 was already described with respect to the third embodiment, or a predetermined value is transmitted as the second code word to the second communications device C2.

In a subsequent step S53, the second code word is
10 transmitted from the second communications device C2 to a first communications device C1. For this purpose the second communications device C2 may display the second code word for an input into the first communications device C1, or it may be transmitted in another way from the second
15 communications device C2 to the first communications device C1.

In a further step S54, the second code word is transmitted from the first communications device C1 to access device A
20 and is checked there for correctness, as described above. If the code word transmitted in step S54 is determined to be invalid, the process moves on to the end point of the flow diagram shown in Fig. 6.

25 If the second code word transmitted in step S54 is found to be valid, in step S35 data access or access to functions of the system is released by access device A. This access to data or to functions of the system may be carried out, as described above, by one of the communications devices
30 C1, C2.

As in the examples of embodiments described above, the connections between the first communication device C1 and/or the second communications device C2 and the access device A may be established via separate communications routes independent from each other. Furthermore, as it was described with respect to the example of embodiment 2, the first communications device C1 may be a data processing unit and the connection between access device A and the data processing unit may be established via a data processing device network. Preferably, a data processing unit is selected as the first communications device C1 and a mobile telephone as the second communications device.

In this fourth embodiment, the second code word transmitted to communications device C1 in step S52 may be computed using subscriber-specific data and/or a date and/or a time and, in certain cases, it may be valid only for a single access session. In addition, the communications device C2 may be a telephone or a mobile telephone, and the connection between communications device C2 and access device A may be established via a fixed telephone network and/or via a mobile telephone network. Attention is drawn to the fact that the communications device C1 may also be a telephone or a mobile telephone, and communications device C2 may be a data processing unit.

The transmission of the code words may be carried out as was already described in the second embodiment. The grant of access to system S may be such that a subscriber can access subscriber data allocated to him, change or store them, or the subscriber may be allowed to activate or

deactivate certain services. The subscriber data are preferably stored in a home location register (HLR). Should a mobile telephone be used as the communications device, access to subscriber data may advantageously be restricted
5 to subscriber data allocated to a subscriber, to whom the used mobile telephone is allocated.

In addition, one of the transmitted code words may be used for data encoding in data transmission between the first or
10 second communications devices C1, C2 and access device A. Moreover, after release of data access by the access device A at least one further code word may be transmitted from one of the communications devices C1, C2 to access device A, in order to release expanded access to the system or to
15 other data which are stored in the memory device.

Figure 7 shows an embodiment of a device for carrying out the method in accordance with the invention. The figure shows an access device marked A to control access by a user
20 to a remote system S.

The double arrow shown between access device A and system S marks a data connection existing between these two devices. In the case of a GSM system, the access device and the
25 system may communicate with each other within the framework of the MAP (mobile application part) protocol.

E1 shows a mobile telephone. An arrow connects with access device A, denoting, e.g., a mobile radio network. In
30 addition, Fig. 7 shows a data processing unit D2. A double arrow connects with access device A, denoting any data

connection. E.g., this data connection may be an internet and communication may be carried out in accordance with the TCP/IP protocol.

5 In accordance with a process shown in connection with the examples of embodiments 1 to 4 for the authentication of a user, in the case of correct input of the code words, the access device releases access to the system. Then either by the mobile telephone E1 and/or the data processing unit E2
10 via the respective connections to the access device, access to system S can be obtained. In the embodiment, supported by a graphic display of the data processing unit E2, the subscriber-specific user profile in an HLR of a memory device of a mobile radio network, for example a GSM
15 network, may be stored, retrieved or changed. It is furthermore conceivable that other functions of system S may be controlled by one of the data processing devices G. In addition, by the input of further code words, after connection has been established between the devices E1, E2,
20 access to further functions of system S or to other subscriber-specific data in the subscriber register HLR may be enabled.

Patent claims

1. A method for secure user access to a separate system
(S) having data stored in a memory device, comprising
5 the following steps:

establishing a first connection between a first
communications device (C1) and an access device (A)
and transmission of a first code word from the first
10 communications device (C1) to the access device (A);

comparing the first code word with first
authentication data stored in the access device (A);

15 establishing a second connection between a second
communications device (C2) and the access device (A),
and transmitting a second code word from the second
communications device (C2) to the access device (A);

20 comparing the second code word with second
authentication data stored in access device (A); and

granting access to the system (S) via at least of the
communications devices (C1, C2), given the presence of
25 a predetermined relationship between the first and
second code words and the second authentication data
stored in access device (A).
2. Method in accordance with claim 1, characterized by
30 the steps:

transmitting the second or a third code word from access device (A) to the first communications device (C1);

5 transmitting the second or third code word from the first communications device (C1) to the second communications device (C2); and

10 transmitting the second or third code word from the second communications device (C2) to the access device (A), for validating the code word before access to the data is granted.

3. A method for secure user access to a separate system
15 (S) having data stored in a memory device, comprising the steps below:

establishing a first connection between a first communications device (C1) and an access device (A)
20 and transmission of a first code word from the first communications device (C1) to access device (A);

comparing the first code word with first authentication data stored in the access device (A);
25

given the presence of a predetermined relationship between the first code word and the authentication data stored in the access device (A), establishing a second connection between the access device (A) and a
30 second communications device (C2) and transmitting a second code word from access device (A) to the second

communications device (C2);

transmitting the second code word from the second
communications device (C2) to the first communications
5 device (C1);

transmitting the second code word from the first
communications device (C1) to access device (A);

10 comparing the second code word with second
authentication data stored in access device (A); and

granting access to the system (S) with at least one of
the communication devices (C1, C2), given the presence
15 of a predetermined relationship between the second
code word and the second authentication data stored in
the access device (A).

4. Method in accordance with one of the preceding claims,
20 characterized by establishing the first and second
connection via communications routes independent from
each other.

5. Method in accordance with one of the preceding claims,
25 characterized in that at least the first
communications device (C1) is constituted by a data
processing unit and the connection between the data
processing unit and the access device (A) is
established via a data processing device network.

30

6. Method in accordance with claim 5, characterized in

that an internet is used for the connection between access device (A) and the data processing unit.

- 5 7. Method in accordance with one of the preceding claims, characterized in that a telephone is used as one of the communications devices (C1, C2) and the connection between the telephone and access device (A) is established via a telephone network.
- 10 8. Method in accordance with claim 7, characterized in that a mobile telephone is used as communications device (C1, C2).
- 15 9. Method in accordance with claims 7 or 8, characterized in that the first or second code word is transmitted by pressing a call demand key.
- 20 10. Method in accordance with one of claims 7 to 9, characterized in that the system (S) is a GSM network and the memory device is a home location register storing subscriber-specific data.
- 25 11. Method in accordance with one of the preceding claims, characterized in that at least one of the code words is generated by access device (A) and is valid only for one access session.
- 30 12. Method in accordance with claim 11, characterized in that at least one of the code words is generated using a subscriber identification and at least one of time and date.

13. Method in accordance with one of the preceding claims,
characterized in that one of the code words is used
for data encoding in a data transmission between the
5 access device (A) and at least one of the first and
second communications devices (C1, C2)s.
14. Method in accordance with one of the preceding claims,
characterized in that after the release of data access
10 via one of the communications devices (C1, (C2), at
least one further code word is transmitted to access
device (A) to release expanded access to the system or
to other data which are stored in the memory device.
- 15 15. A device for carrying out the method in accordance
with one of the preceding claims, comprising
- an access device (A) connected to the system (S);
- 20 a data processing unit connectable to the access
device (A) via a data processing device network; and
- a fixed network telephone or a mobile telephone
connectable to the access device (A) via a fixed
25 network and/or a mobile radio network.

1 / 4

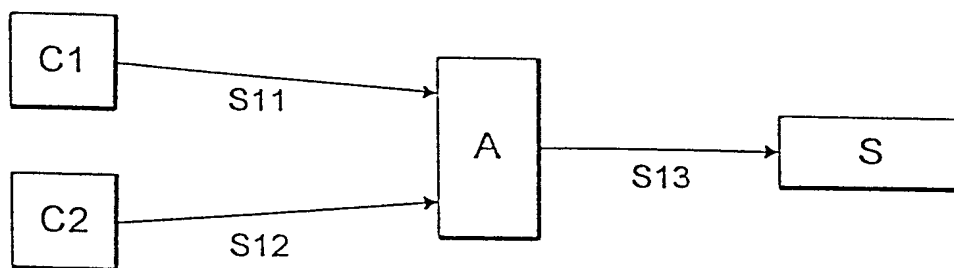


Fig. 1

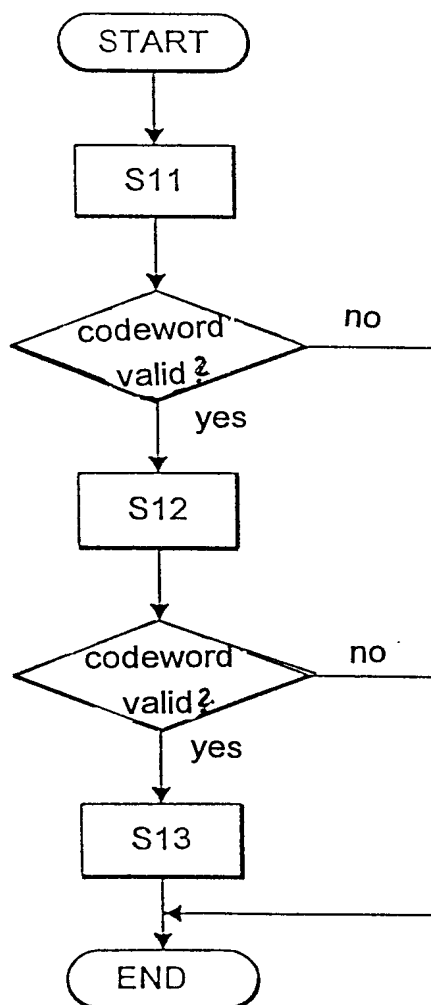


Fig. 2

2 / 4

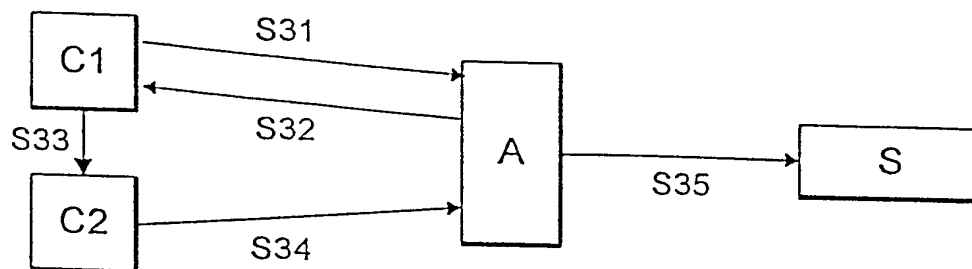


Fig. 3

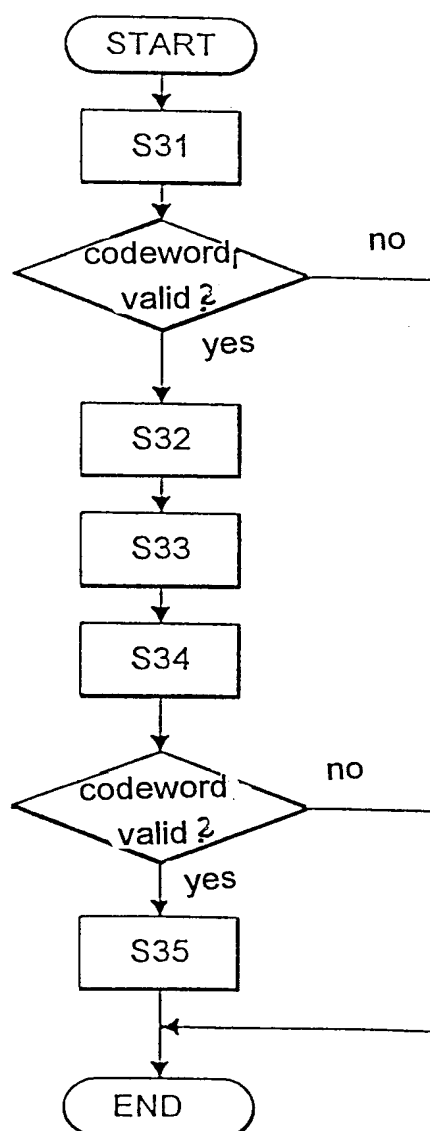


Fig. 4

3 / 4

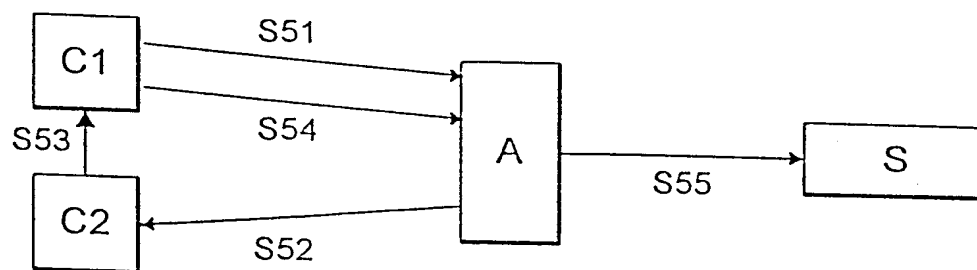


Fig. 5

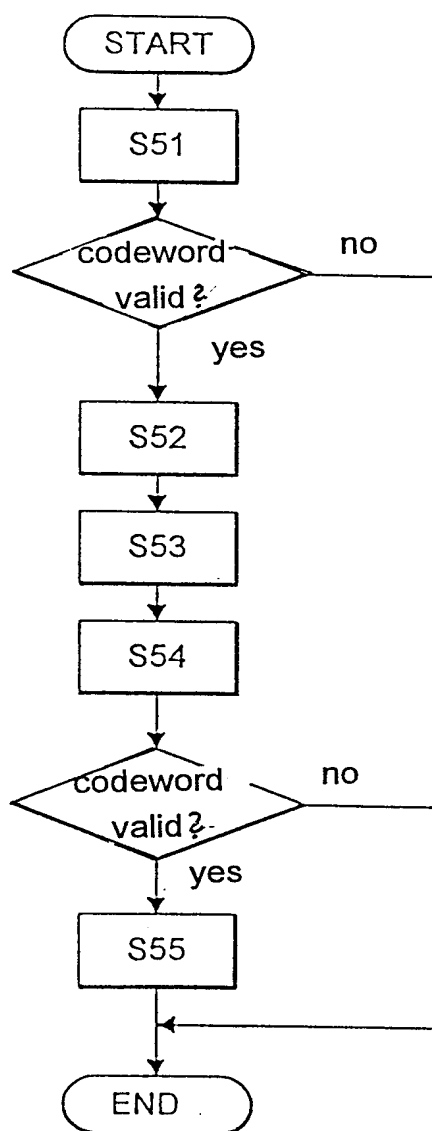


Fig. 6


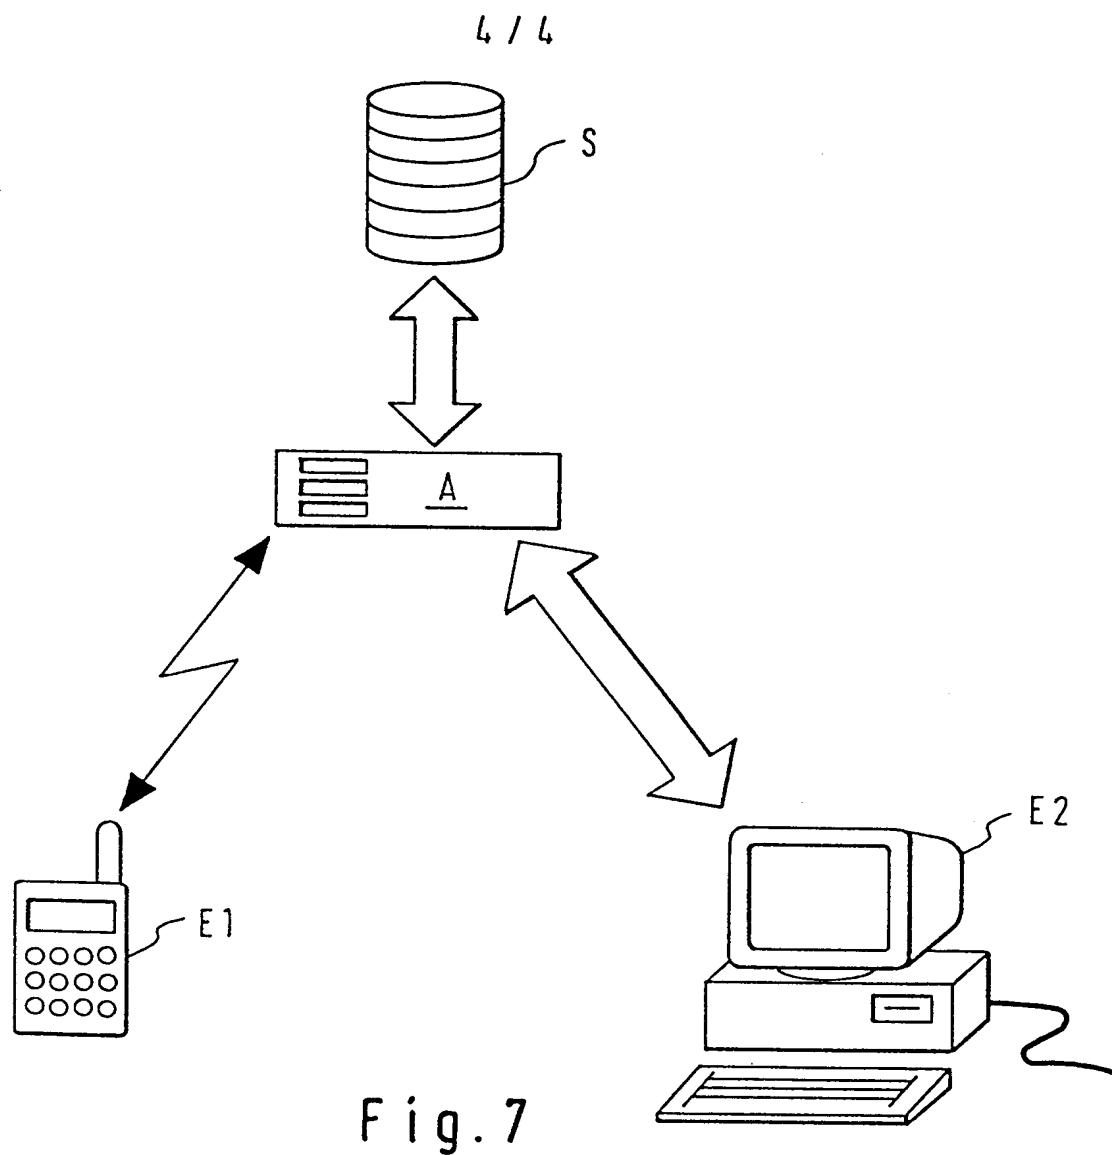


Fig. 8

Prior art

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 98/04249

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G06F1/00 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G06F H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 95 19593 A (KEW MICHAEL JEREMY ; LOVE JAMES SIMON (GB)) 20 July 1995	3-6
Y	see abstract	1,7,8
A	see page 7, line 10 - page 12, line 3 see figures 1,2	2
Y	US 5 668 876 A (FALK JOHAN PER ET AL) 16 September 1997	1,7,8
X	see abstract see column 1, line 66 - column 2, line 37 see column 2, line 66 - column 4, line 45 see column 5, line 48 - column 6, line 10 see figures 1,2	15
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 February 1999

Date of mailing of the international search report

03/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lievens, K

INTERNATIONAL SEARCH REPORT

Inte. national Application No

PCT/EP 98/04249

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	NL 1 007 409 C (NEDERLAND PTT) 18 November 1997 see abstract see page 1, line 1 - page 3, line 5 see figure 1 ---	1,3,15
E	DE 197 22 424 C (ERICSSON TELEFON AB L M) 6 August 1998 see the whole document -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/04249

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9519593	A	20-07-1995	AU 1390395 A	01-08-1995
			GB 2300288 A	30-10-1996
US 5668876	A	16-09-1997	AU 692881 B	18-06-1998
			AU 2688795 A	19-01-1996
			CA 2193819 A	04-01-1996
			EP 0766902 A	09-04-1997
			FI 965161 A	13-02-1997
			JP 10502195 T	24-02-1998
			WO 9600485 A	04-01-1996
NL 1007409	C	18-11-1997	NONE	
DE 19722424	C	06-08-1998	NONE	